

U series

CLASSIC SPEAKER



pro audio




U series is a group of classic professional speaker with the characteristics of high power, high SPL, clear and bright full-range sound, rich and elastic bass, all use high quality units. The cabinet is made of multi-layer composite plywood with wear-resistant polyurea paint.

FEATURES

- High quality units, high strength plywood
- Multi-hanging points and support, easy and quick operation
- Complete models

APPLICATIONS

- Conference rooms
- Multi-purpose halls
- Various entertainment venues
- Mobile performances

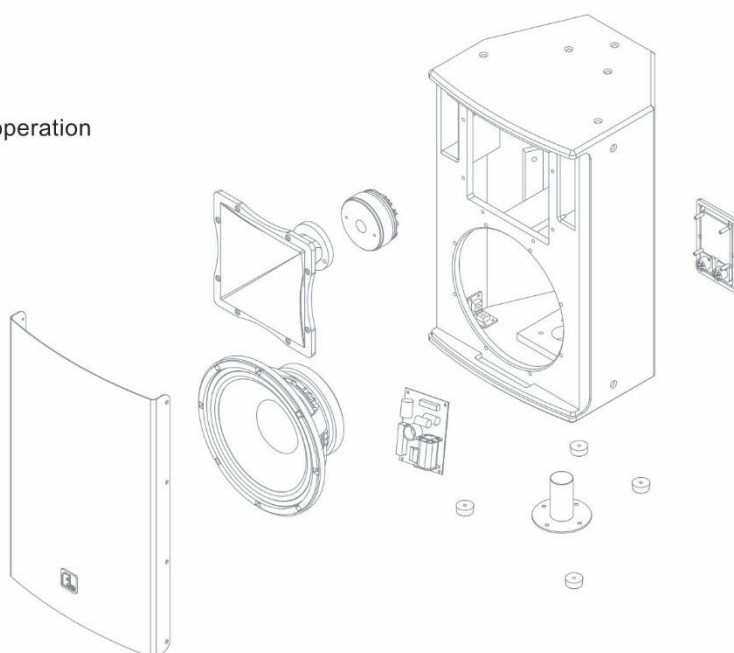



pro audio

U series Classic Speaker


Two-way Full-range Loudspeaker System



MODEL	U106VI	U108VI	U110VI
FREQUENCY RESPONSE(-3dB)	90 Hz-18kHz	60 Hz-18kHz	55 Hz-18kHz
FREQUENCY RESPONSE(-10dB)	85Hz-20KHz	55 Hz-20kHz	50 Hz-20kHz
LF DRIVER	1 × 6.5"/ 2"voice coil	1 × 8"/ 2"voice coil	1 × 10"/ 2.5"voice coil
HF DRIVER	1 × 1"/ 1"voice coil	1 × 1"/ 1"voice coil	1 × 1"/ 1.7"voice coil
RATED POWER	120W RMS,480W peak	150W RMS,600W peak	250W RMS,1000W peak
SENSITIVITY(1watt/1meter)	90dB	93dB	95dB
MAXIMUM SPL	111dB continuous,117 dB peak	115dB continuous,121 dB peak	119dB continuous,125 dB peak
IMPEDANCE	8 ohms	8 ohms	8 ohms
DISPERSION(-6dB)	110° × 50°	90° × 50°	90° × 50°
CROSSOVER FREQUENCIES	2.5kHz	2.8kHz	2kHz
INPUT CONNECTORS	Covered barrier strip terminals	Covered barrier strip terminals	2 × Speakon NL4
PACKAGE SIZE	510 × 285 × 450 mm(1 Pair)	320 × 310 × 525 mm	398 × 378 × 577 mm
NET WEIGHT	6 kg/pc	10 kg/pc	15 kg/pc
GROSS WEIGHT	15 kg/pair	12 kg/pc	18 kg/pc

Useries Classic Speaker

Two-way Full-range Loudspeaker System

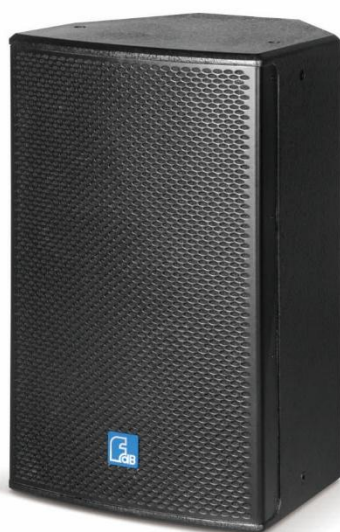

MODEL	U112VI	U112DA	U112HVI
FREQUENCY RESPONSE(-3dB)	50Hz-18kHz	50Hz-18kHz	50 Hz-18kHz
FREQUENCY RESPONSE(-10dB)	45 Hz-20kHz	45 Hz-20kHz	45 Hz-20kHz
LF DRIVER	1 × 12"/ 3"voice coil	1 × 12"/ 3"voice coil	1 × 12"/ 3"voice coil
HF DRIVER	1 × 1"/ 1.7"voice coil	1 × 1"/ 1.7"voice coil	1 × 1.4"/ 3"voice coil
RATED POWER	300W RMS,1200W peak	1500W/8Ω + 460W/8Ω	450W RMS,1800W peak
SENSITIVITY(1watt/1meter)	97dB	--	97dB
MAXIMUM SPL	122dB continuous,128dB peak	122dB continuous,128dB peak	124dB continuous,130 dB peak
IMPEDANCE	8 ohms	--	8 ohms
DISPERSION(-6dB)	90° × 40°	90° × 40°	90° × 40°
CROSSOVER FREQUENCIES	2kHz	--	1.5kHz
INPUT CONNECTORS	2 × Speakon NL4	XLR	2 × Speakon NL4
PACKAGE SIZE	464 × 444 × 722 mm	464 × 444 × 722 mm	530 × 495 × 710 mm
NET WEIGHT	21 kg/pc	23 kg/pc	25 kg/pc
GROSS WEIGHT	25 kg/pc	27 kg/pc	29 kg/pc



pro audio

U series Classic Speaker

Two-way Full-range Loudspeaker System



MODEL	U115VI	U115DA	U115HVI	U215VI	U215AVI
FREQUENCY RESPONSE(-3dB)	45Hz-18kHz	45Hz-18kHz	45 Hz-18kHz	40 Hz-18kHz	40 Hz-18kHz
FREQUENCY RESPONSE(-10dB)	40 Hz-20kHz	40 Hz-20kHz	40 Hz-20kHz	35 Hz-20kHz	35 Hz-20kHz
LF DRIVER	1 × 15"/ 3"voice coil	1 × 15"/ 3"voice coil	1 × 15"/ 4"voice coil	2 × 15"/ 4"voice coil	2 × 15"/ 3"voice coil
HF DRIVER	1 × 1.4"/ 3"voice coil	1 × 1"/ 1.7"voice coil	1 × 1.4"/ 3"voice coil	1 × 2"/ 3"voice coil	1 × 2"/ 3"voice coil
RATED POWER	400W RMS, 1600W peak	1500W/8Ω + 460W/8Ω	600W RMS, 2400W peak	1200W RMS, 4800W peak	300W/8Ω + 1200W/4Ω
SENSITIVITY(1watt/1meter)	98dB	--	98dB	101dB	--
MAXIMUM SPL	124dB continuous 130dB peak	124dB continuous 130dB peak	126dB continuous 132 dB peak	132dB continuous 138dB peak	130dB continuous 136dB peak
IMPEDANCE	8 ohms	--	8 ohms	4 ohms	--
DISPERSION(-6dB)	90° × 40°	90° × 40°	90° × 40°	90° × 50°	90° × 50°
CROSSOVER FREQUENCIES	1.5kHz	--	1.5kHz	1.5kHz	--
INPUT CONNECTORS	2 × Speakon NL4	XLR	2 × Speakon NL4	2 × Speakon NL4	XLR
PACKAGE SIZE	550 × 524 × 807mm	550 × 524 × 807mm	550 × 524 × 807mm	652 × 592 × 1235mm	652 × 592 × 1235mm
NET WEIGHT	30 kg/pc	29 kg/pc	33 kg/pc	64 kg/pc	55 kg/pc
GROSS WEIGHT	35 kg/pc	34 kg/pc	38 kg/pc	70 kg/pc	61 kg/pc

Useries Classic Speaker

Subwofer System



MODEL	U115W	U115WA
FREQUENCY RESPONSE(-3dB)	45Hz-250Hz	45Hz-250Hz
FREQUENCY RESPONSE(-10dB)	40Hz-300Hz	40Hz-300Hz
LF DRIVER	1×15"/4"voice coil	1×15"/4"voice coil
RATED POWER	600W RMS	1200W/4Ω
	2400W peak	

SENSITIVITY(1watt/1meter)	99dB	--
MAXIMUM SPL	127dB continuous	127dB continuous
	133dB peak	133dB peak
IMPEDANCE	8 ohms	—
INPUT CONNECTORS	2×Speakon NL4	XLR
PACKAGE SIZE	662×540×597mm	662×540×597mm
NET WEIGHT	31 kg/pc	33 kg/pc
GROSS WEIGHT	34 kg/pc	36 kg/pc








MODEL	U118W	U118WA
FREQUENCY RESPONSE(-3dB)	40Hz-250Hz	40Hz-250Hz
FREQUENCY RESPONSE(-10dB)	35Hz-300Hz	35Hz-300Hz
LF DRIVER	1×18"/4"voice coil	1×18"/4"voice coil
RATED POWER	600W RMS	1200W/4Ω
	2400W peak	

SENSITIVITY(1watt/1meter)	100dB	--
MAXIMUM SPL	128dB continuous	128dB continuous
	134dB peak	134dB peak
IMPEDANCE	8 ohms	—
INPUT CONNECTORS	2×Speakon NL4	XLR
PACKAGE SIZE	870×652×640mm	870×652×640mm
NET WEIGHT	40 kg/pc	42 kg/pc
GROSS WEIGHT	48 kg/pc	50 kg/pc

MODEL	U218W	U218WA
FREQUENCY RESPONSE(-3dB)	40Hz-250Hz	40Hz-250Hz
FREQUENCY RESPONSE(-10dB)	35Hz-300Hz	35Hz-300Hz
LF DRIVER	2×18"/4"voice coil	2×18"/4"voice coil
RATED POWER	1200W RMS	1200W/4Ω
	4800W peak	+1200W/4Ω


SENSITIVITY(1watt/1meter)	103dB	--
MAXIMUM SPL	134dB continuous	134dB continuous
	140dB peak	140dB peak
IMPEDANCE	4 ohms	--
INPUT CONNECTORS	2×Speakon NL4	XLR
PACKAGE SIZE	1272×872×658mm	1272×872×658mm
NET WEIGHT	82 kg/pc	84 kg/pc
GROSS WEIGHT	90 kg/pc	92 kg/pc

Configuration

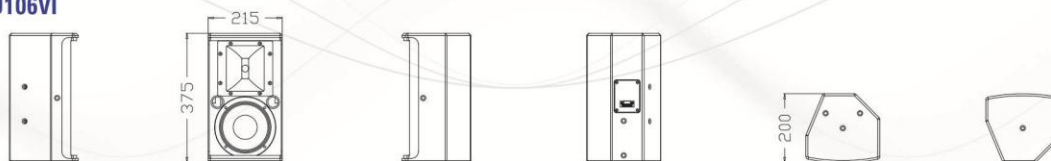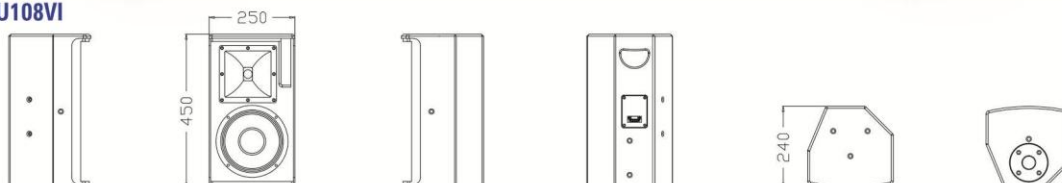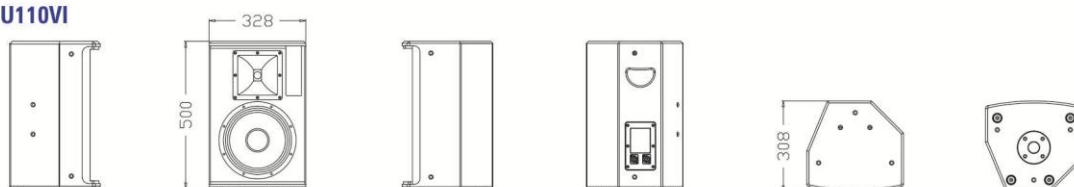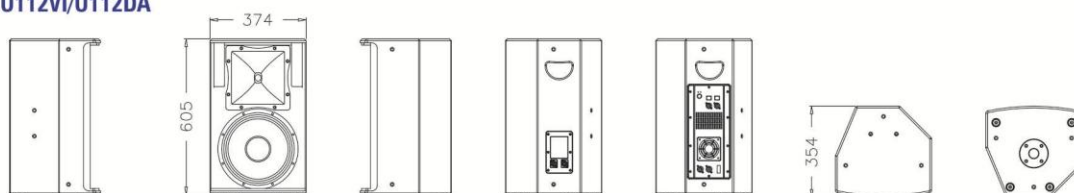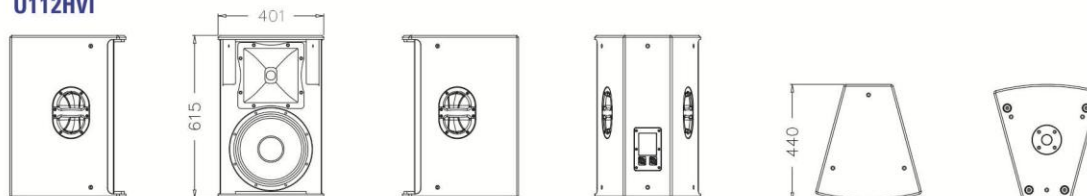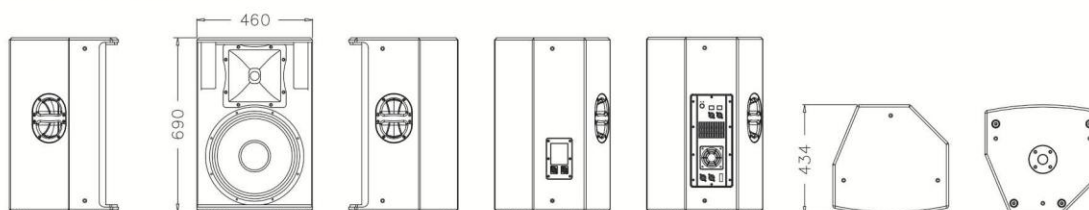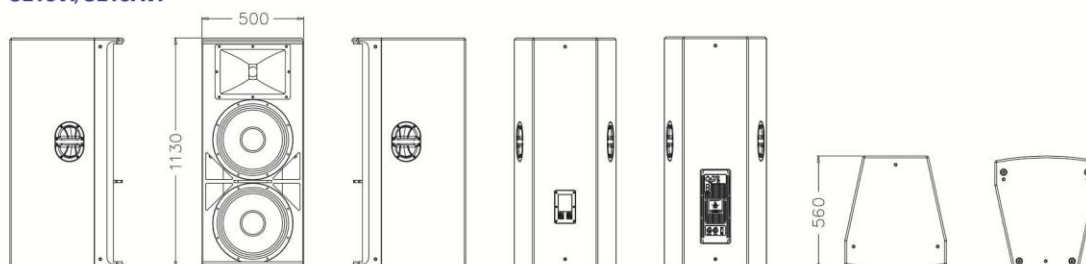U106VI

U108VI

U110VI

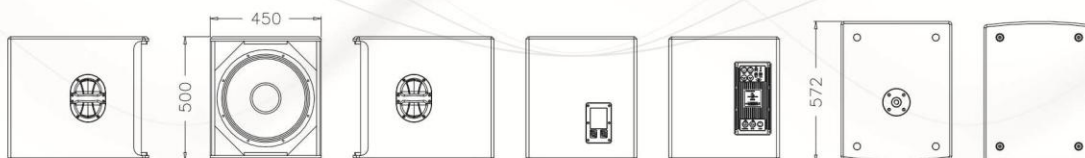U112VI/U112DA

U112HVI

U115VI/U115DA/U115HVI

U215VI/U215AVI


Configuration


U115W/U115WA




U118W/U118WA




U218W/U218WA

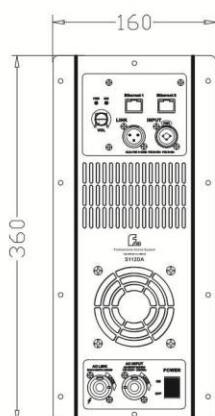


U112DA

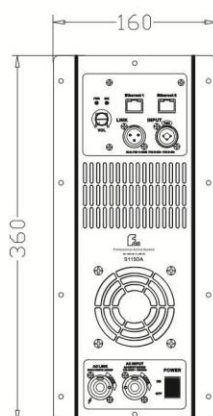


U115DA

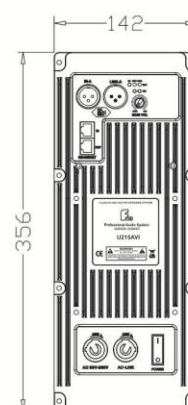


U215AVI



U115WA



U118WA

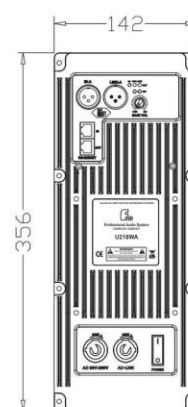

U218WA